



amina S


IOS

with Perific load balancer


Firmware update guide





Open the Perific app and select the charger under Overview to check the current firmware version.

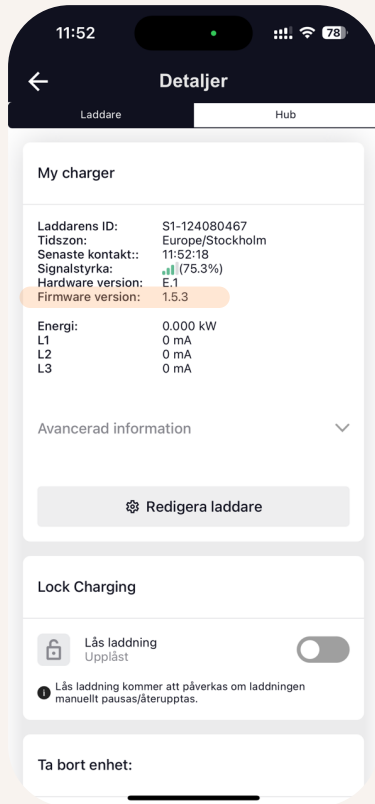


Click
"Download Firmware Zipfile"

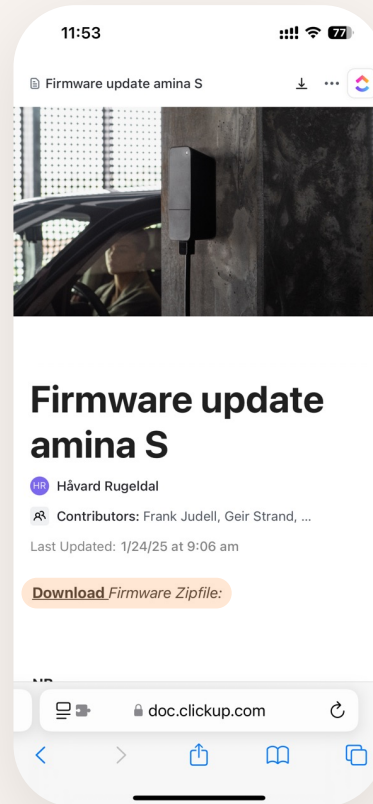


Select
"Hämta"

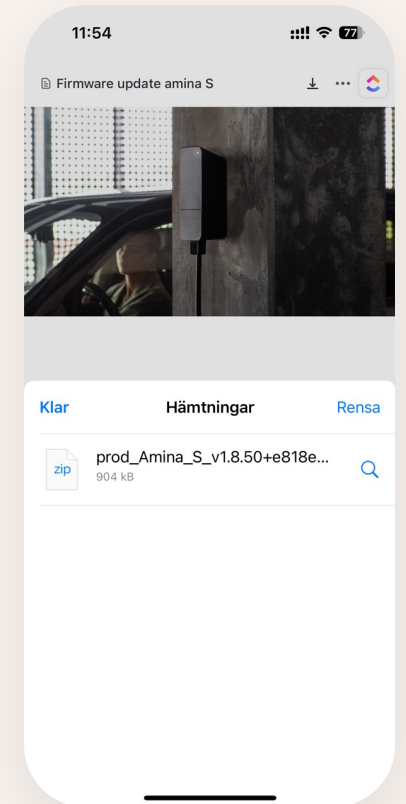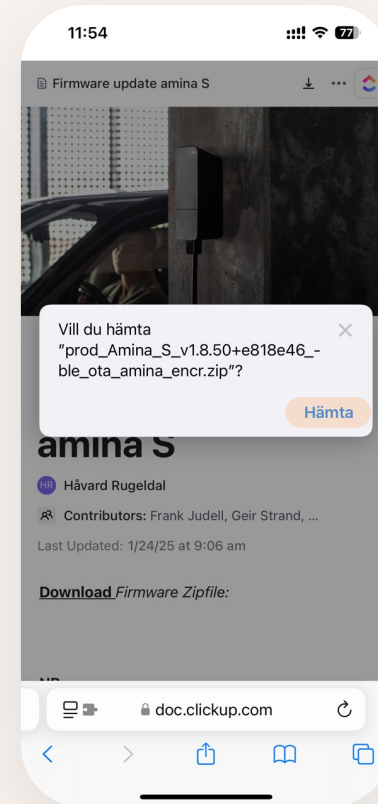

Open **App Store** and search for **nRF Connect for Mobile** or scan the QR-code below.

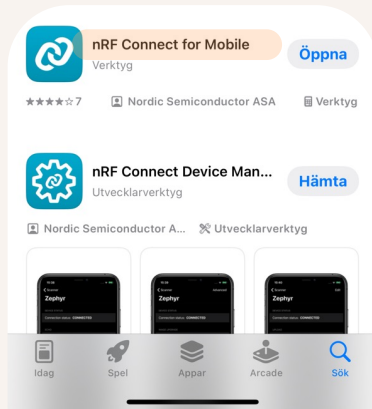

Download the app and open it.

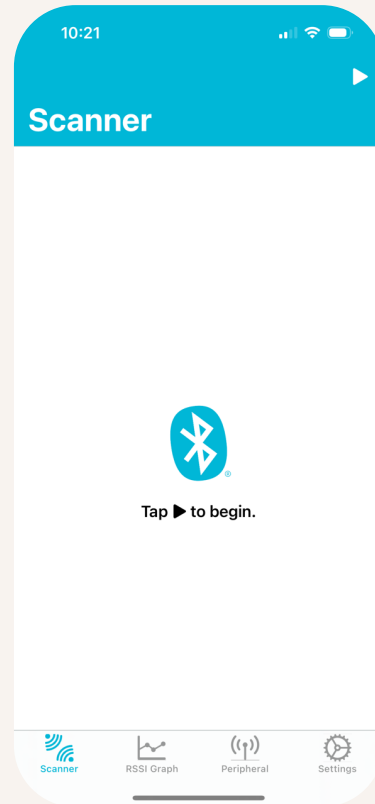


Important!


Before continuing, turn off the power to the Perific Hub.




Select the **arrow** in the upper right corner to start

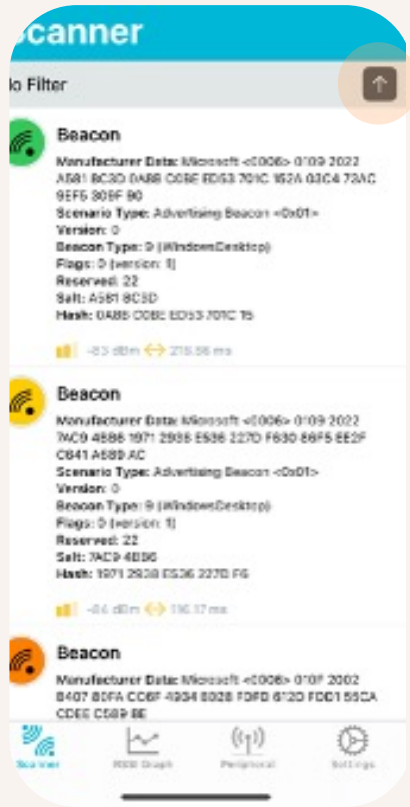


Search for **S1**, which is the beginning of the charger's serial number.

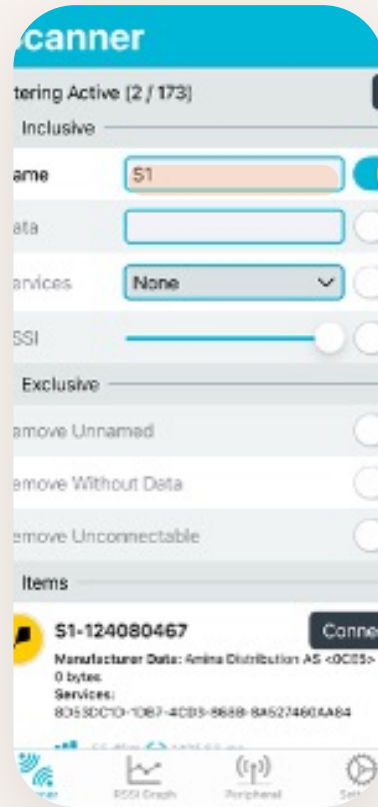


Select **"Connect"**

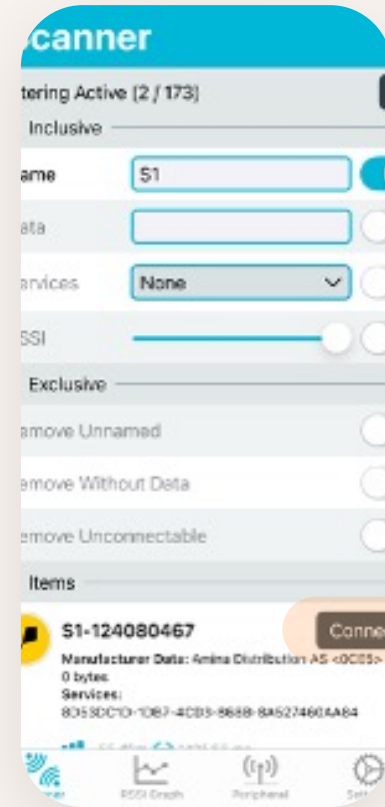


Once connected, select the charger

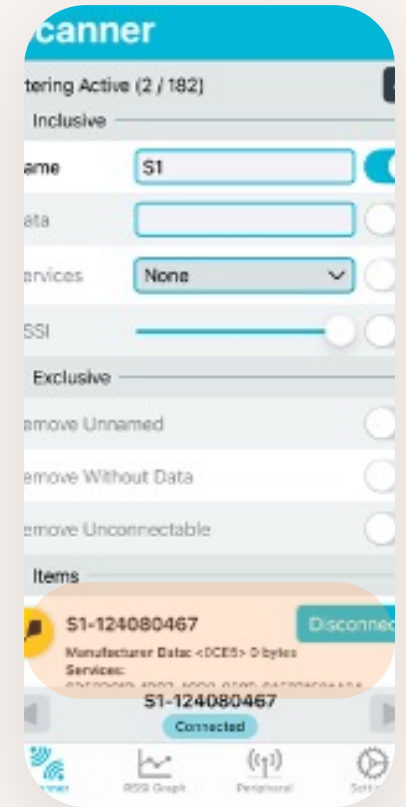


Select "**Open Document Picker**"

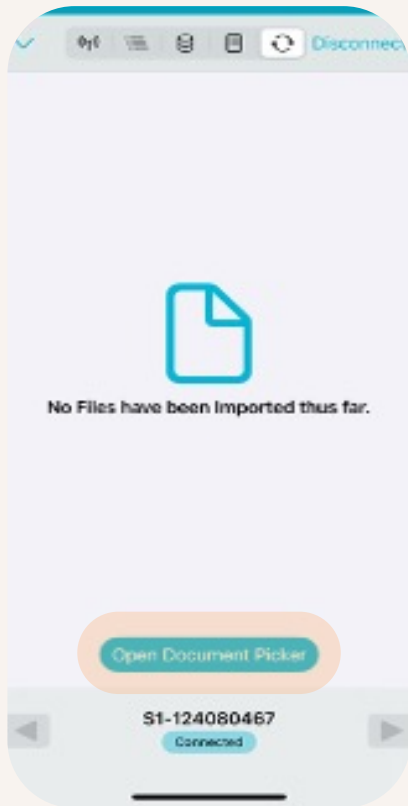


Select the downloaded **ZIP file**

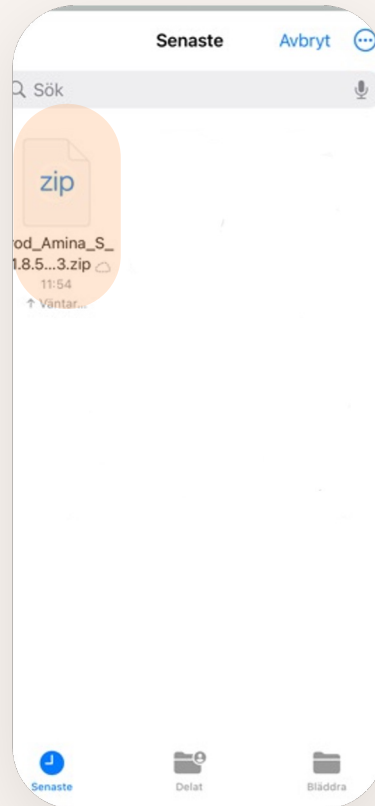

After selecting the file, the screen should appear as shown below

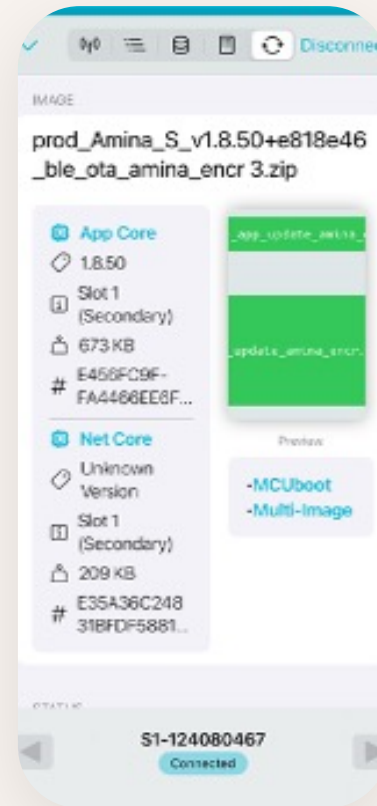

Select "**Start**"

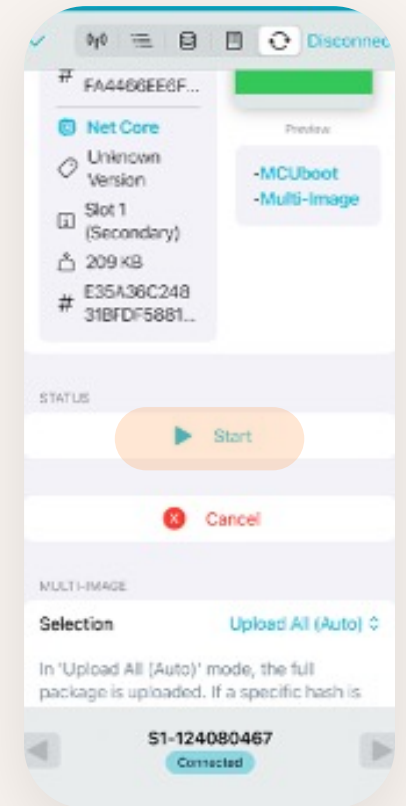


Wait until the update reaches **100%**




Important!


If you get an "Error Failed" message, restart the process and try again

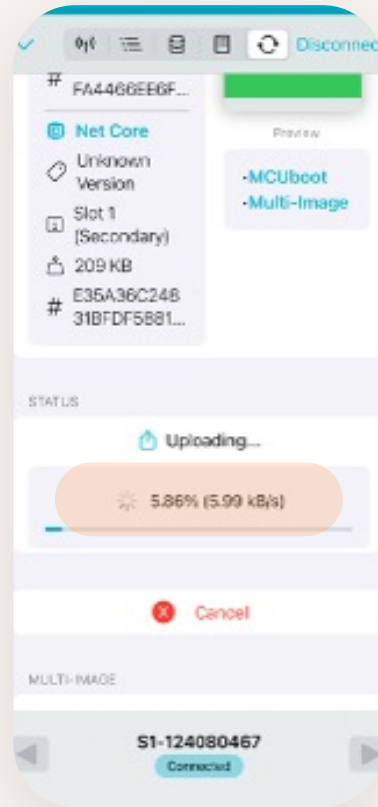


When the update reaches 100%, the charger will emit a purple light

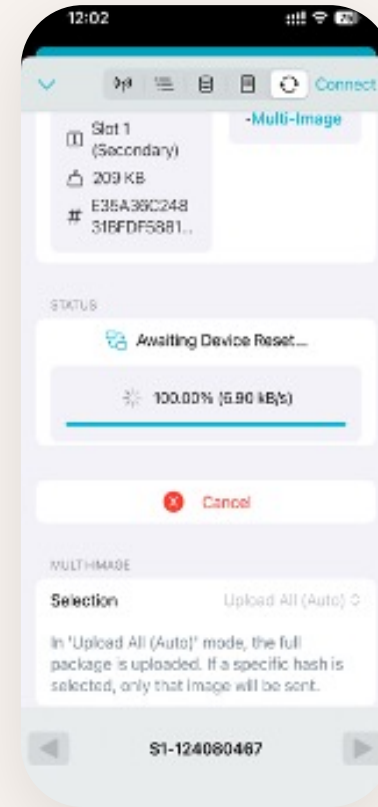

Wait for confirmation

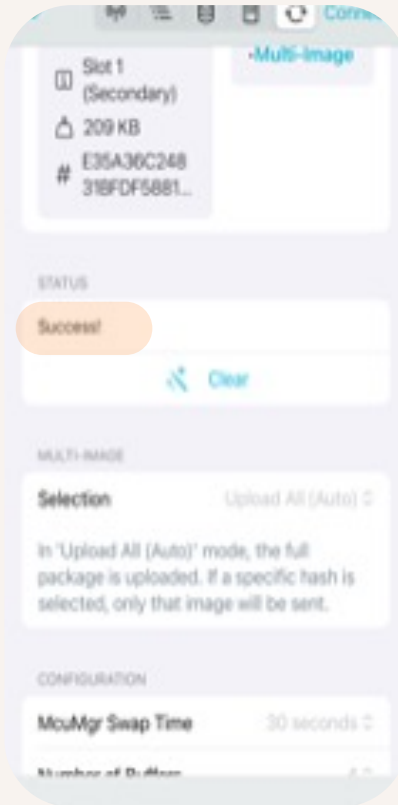

Restore power to the Enegic Hub
Wait approximately **5 minutes**
until the hub goes online.

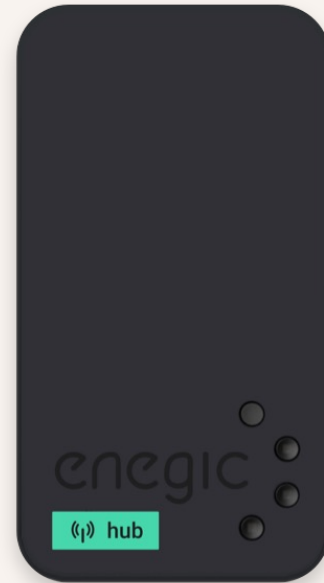

Open the Perific app, select the
charger, and confirm that the update
has been successfully installed.

