




amina S

IOS


Firmware update guide




Click
"Download Firmware Zipfile"

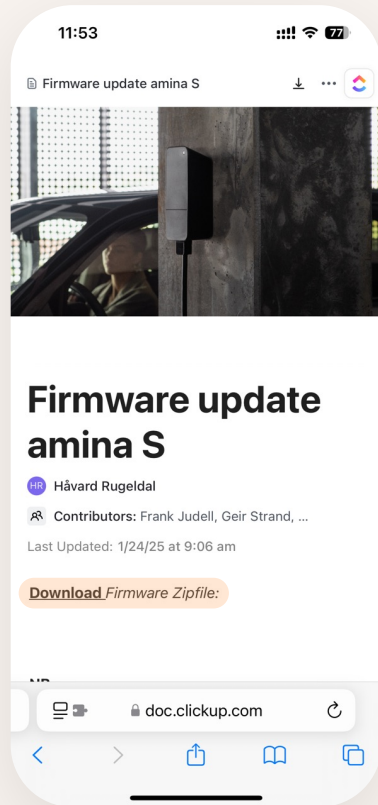


Select
"Hämta"

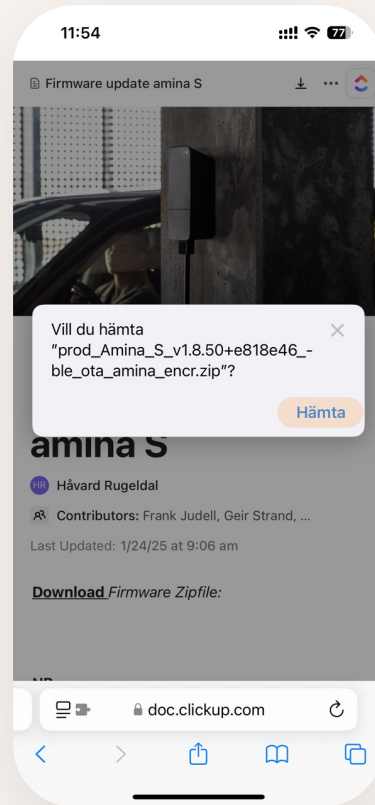


Open **App Store** and search for
nRF Connect for Mobile or scan
the QR-code below.

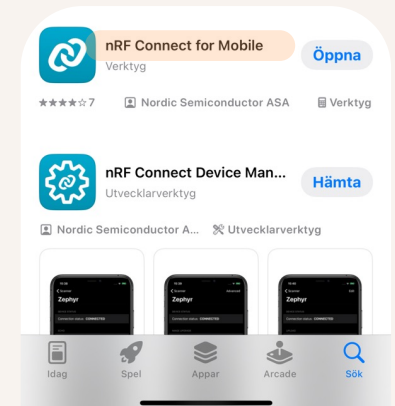


Download the app and open it.

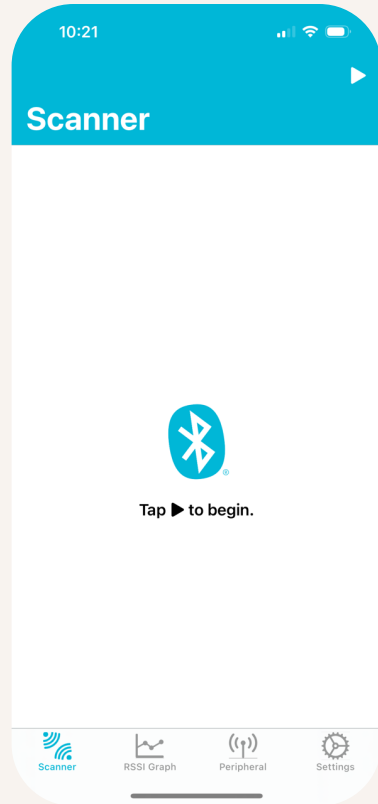


Select the **arrow** in the upper right corner to start

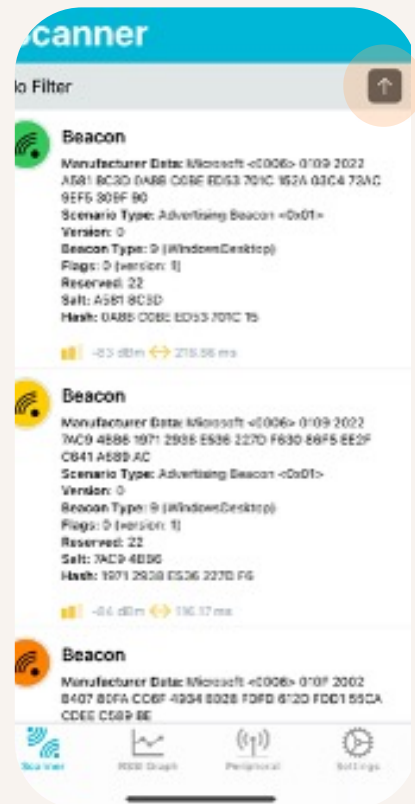

Search for **S1**, which is the beginning of the charger's serial number.

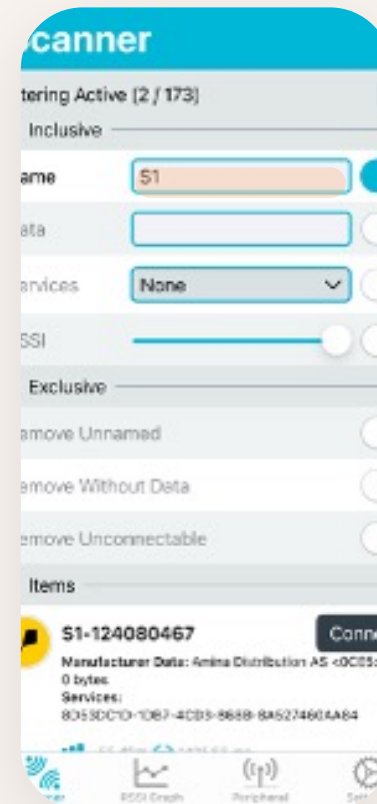


Select **"Connect"**

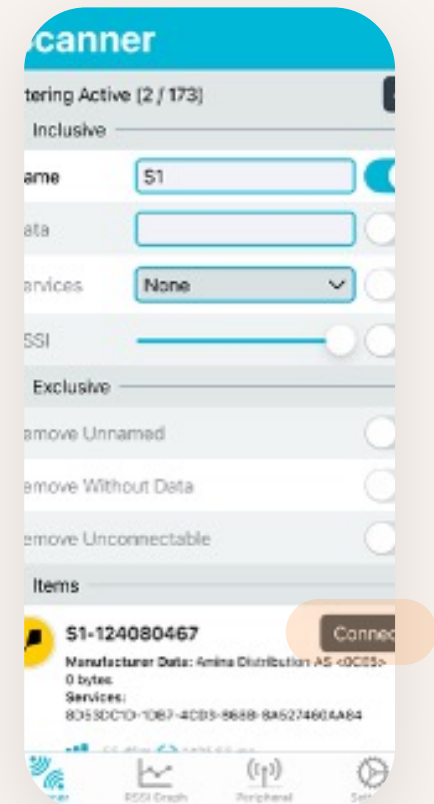


When the charger is connected, click on the charger and then on list view to access this view.




Scroll down to "Firmware Revision String" and select the arrow to see the current firmware.

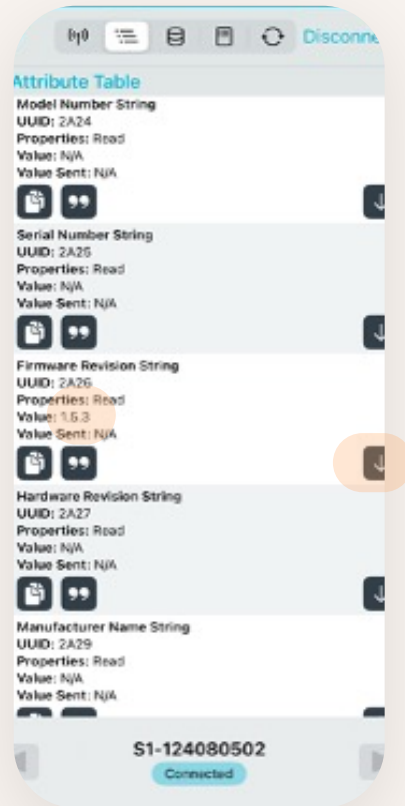


Select "**Open Document Picker**"

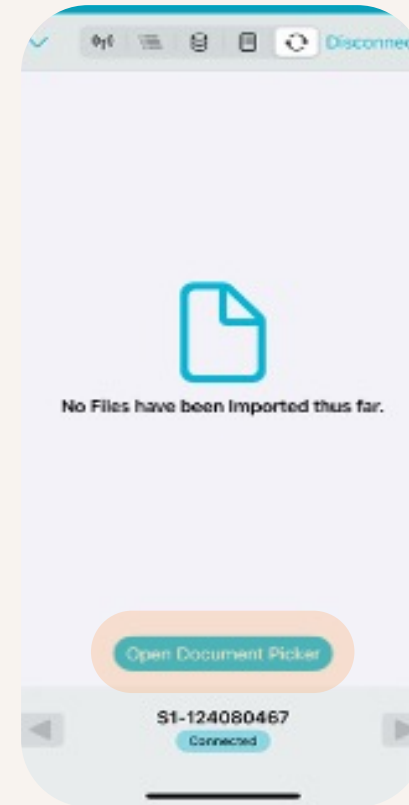


Select the downloaded **ZIP file**

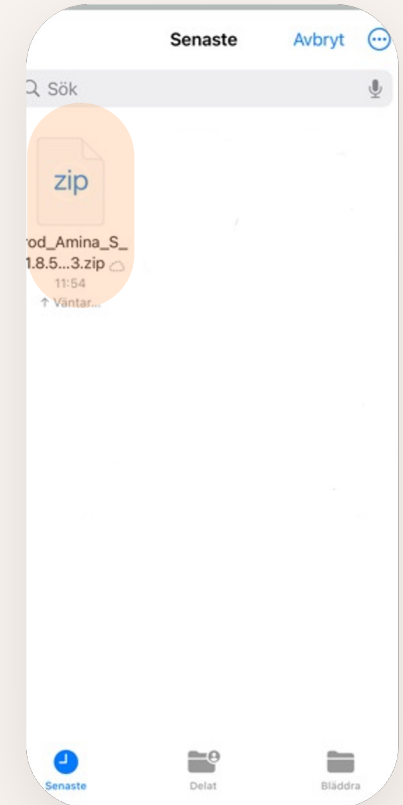


After selecting the file, the screen should appear as shown below

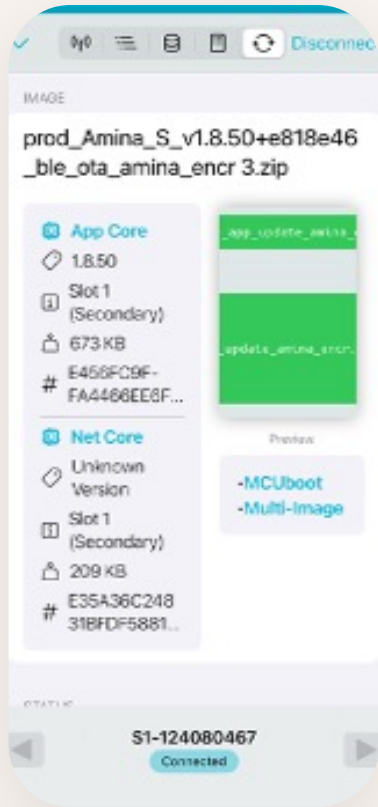

Select “**Start**”

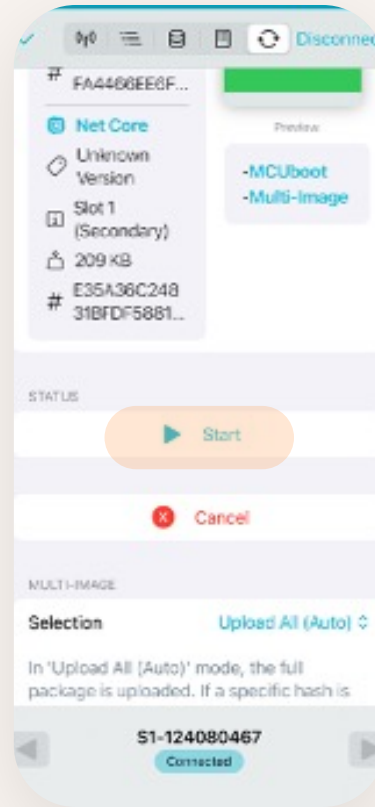


Wait until the update reaches **100%**

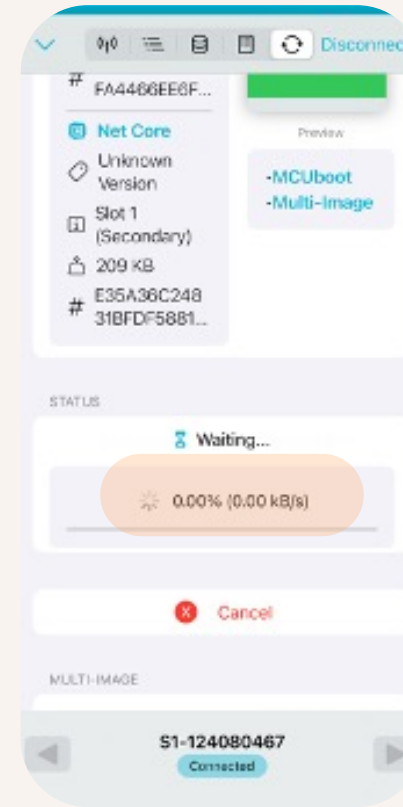

Important!

If you get an "Error Failed" message, restart the process and try again

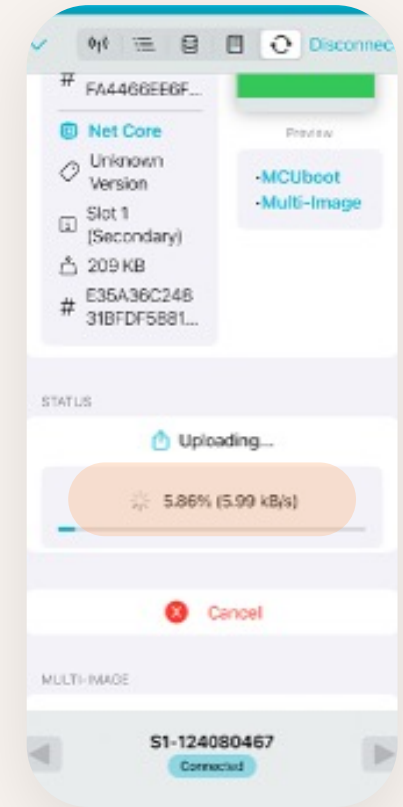

When the update reaches **100%**, the charger will emit a purple light



Wait a few minutes for the charger to restart, then click on "Connect" and select "Check Current Firmware".



Scroll down and click on the arrow and ensure that the charger has the latest firmware.

